
TEXAS EQUIPMENT



TEXAS EQUIPMENT

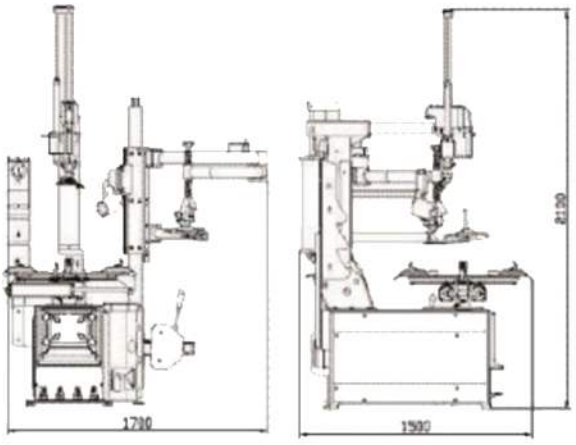

Outside clamp	12"—24"
Inside Clamp	14"—26"
Wheel Width	13"
Max Wheel Diameter	1100mm
Working Pressure	0.8bar-1bar
Bead breaking cylinderforce	2500Kg
Voltage	110V//220V/380V
Power	1.1/0.75KW
Noise	<70dB
Net Weight/Gross Weight	334/379Kg
Packing Dimension	1220x1000x1000mm
Loading QuantityIn40" Container	40sets

- Apply to high grade and flat tyre disassembly and assembly.
- The switch is made of high strength Sterling Silver contact.
- High strength humanized auxiliary arm, easy to assemble and disassemble.
- Use pneumatic backward column, push and pull arm pneumatic lock design.
- Disassemble flat tyre without hurting rim and tyre.
- Aluminum alloy valve and valve stem are made of stainless steel.
- Vientiane big shovel free adjustment angle, large shovel sheath using thickening 6mm anti skidding design.
- The use of pure aluminum shell large cylinder, never rust.
- Adopt pure copper core motor.
- Optional explosive inflating device.
- The Special material head mounting and demounting uith lifetime warranty.